

SLQ3000 Wireless Operators Guide

Product Description

Equipment







Pictures may vary slightly for supplied product.

Manual Calling

CALL FORWARD VOICE A

The call forward button will call a customer forward to the position using the first voice option.



CALL FORWARD VOICE B

The call forward button will call a customer forward to the position using the second voice option.



Close Position

Close Position Function

Press down and release both buttons together to close the position; causes the PDU to display the closed sign for the specific position.



LED Indicators

LED₁

Red – Button pressed and waiting response.

Green – Got reply to button press.

Red Flashing – Low battery warning.




LED 2

Reserved for feature use.




Trouble Shooting

RF Button Issues

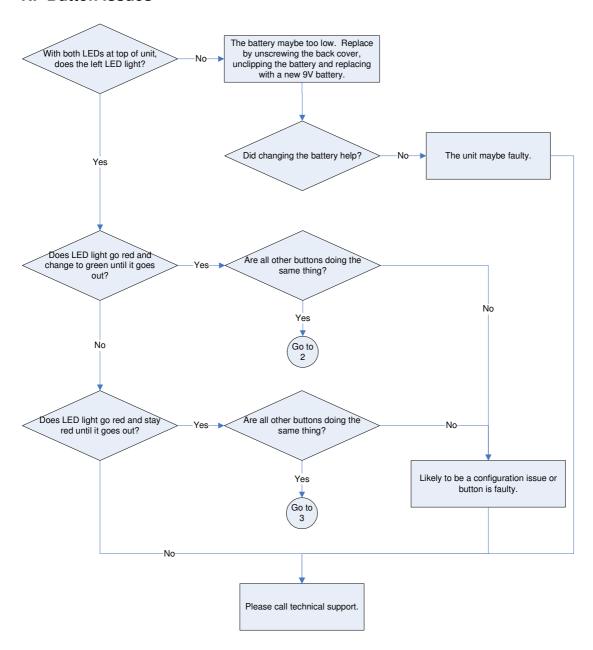




RF Button Issues - Continued

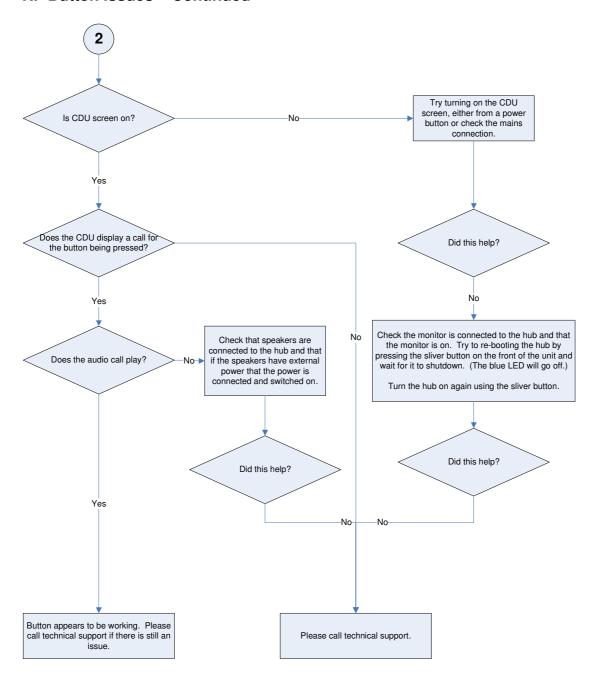



RF Button Issues – Continued

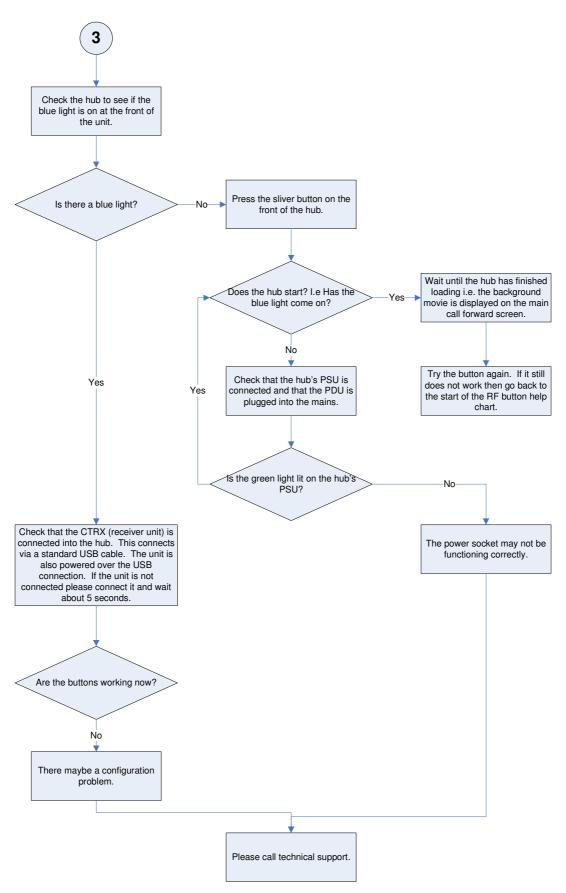



Please report all faults to Tensator Technical Services.

Notes on FCC and CE approval.

- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1)
 This device may not cause harmful interference, and (2) this device must accept any interference received,
 including interference that may cause undesired operation.
- 3. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - --Reorient or relocate the receiving antenna.
 - --Increase the separation between the equipment and receiver.
 - -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - -- Consult the dealer or an experienced radio/TV technician for help.